


# SUBMINIATURE DH Series

## Features

- Ultraminiature dimensions, just 0.323" x 0.106" x 0.244" (8.2mm x 2.7mm x 6.2mm)
- Specially designed for low switching currents and voltages
- Available with or without integrated auxiliary actuator
- Can be fitted to circuit boards in upright position or horizontally with formed terminals

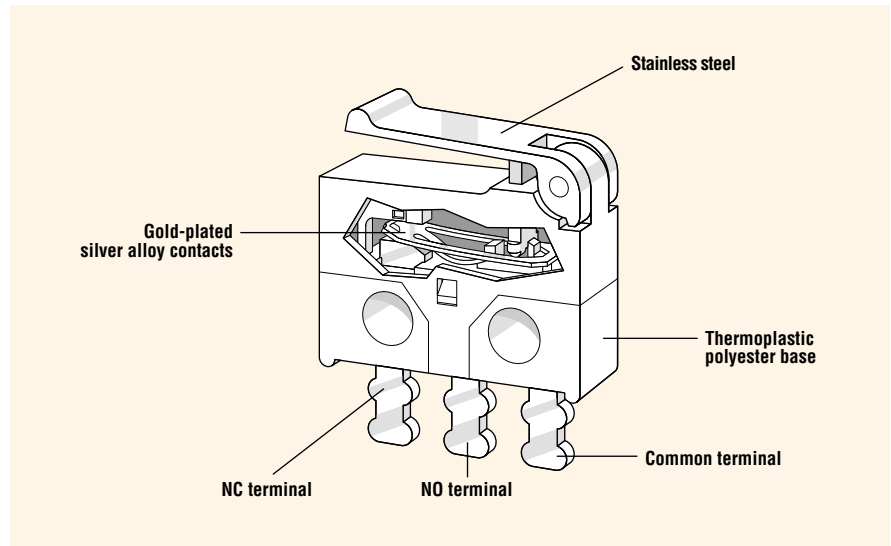

## Electrical Ratings

| Switch Series | Electrical Rating |
|---------------|-------------------|
| DH2           | 5 to 500mA@30VDC  |
| DH3           | 50 to 300mA@30VDC |
| DH4           | 5 to 50mA@30VDC   |

## Specifications

| Electrical           |  |
|----------------------|--|
| Temperature Rating:  | -25°C to +70°C                                       |
| Flammability Rating: | UL94V-O  |
| Materials            |  |
| Base:                | PPS  |
| Button:              | PBT  |
| Cover:               | PBT  |
| Auxiliary Actuator:  | Stainless Steel                                      |
| Terminals:           | Silver-Plated Brass                                  |
| Contacts:            | Silver-Plated Brass (DH3)<br>Gold-Plated Brass (DH4) |

PBT = Polybutyleneterephthalate • PPS = Polyphenylene Sulphide



